




iPhone 4S Dock Connector Cable Replacement

Internal prerequisite.

Written By: Walter Galan

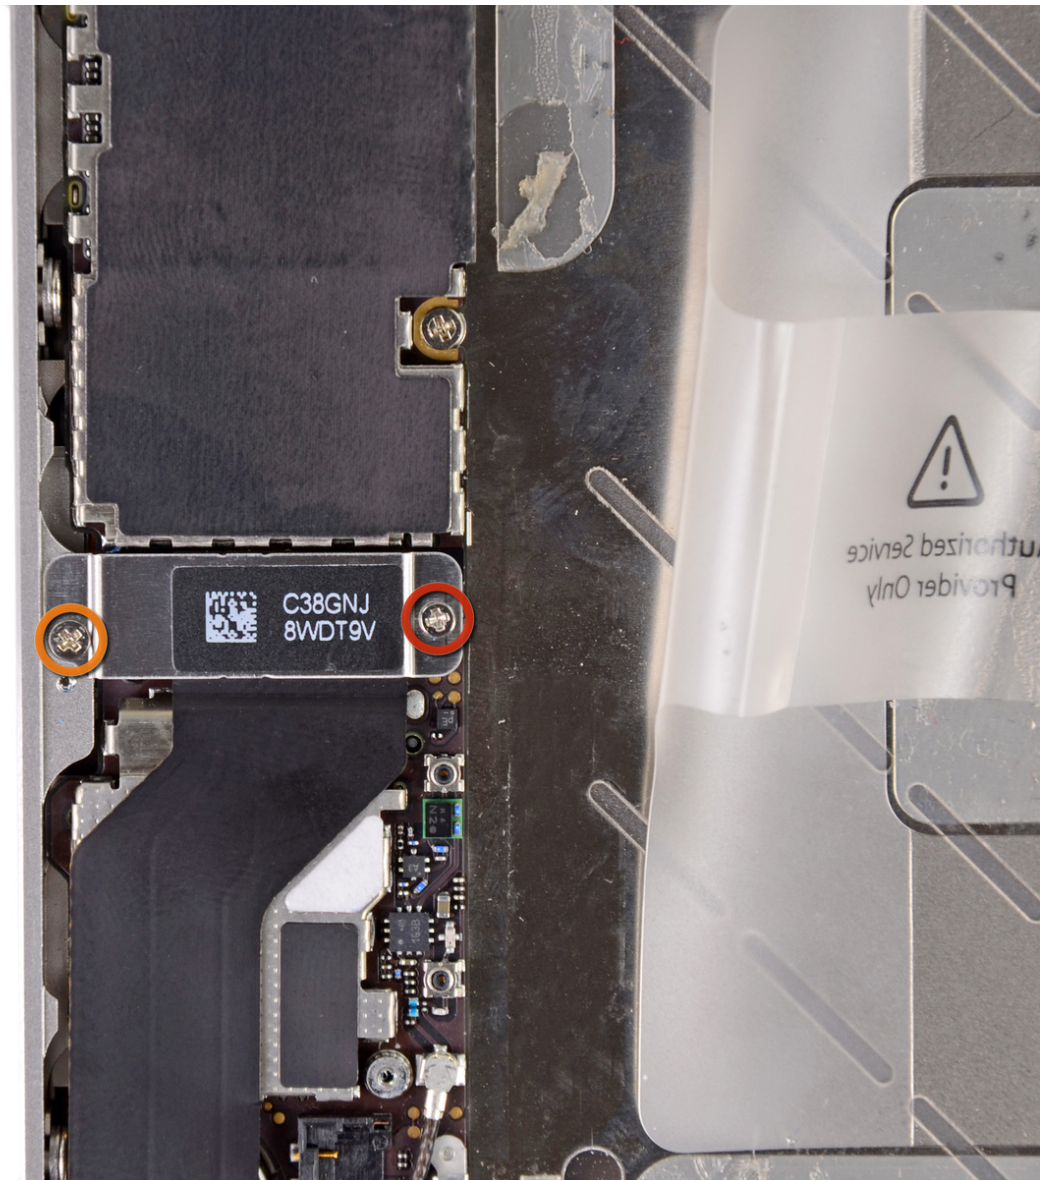

INTRODUCTION


Internal prerequisite.



TOOLS:

- [Phillips #000 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Dock Connector Cable

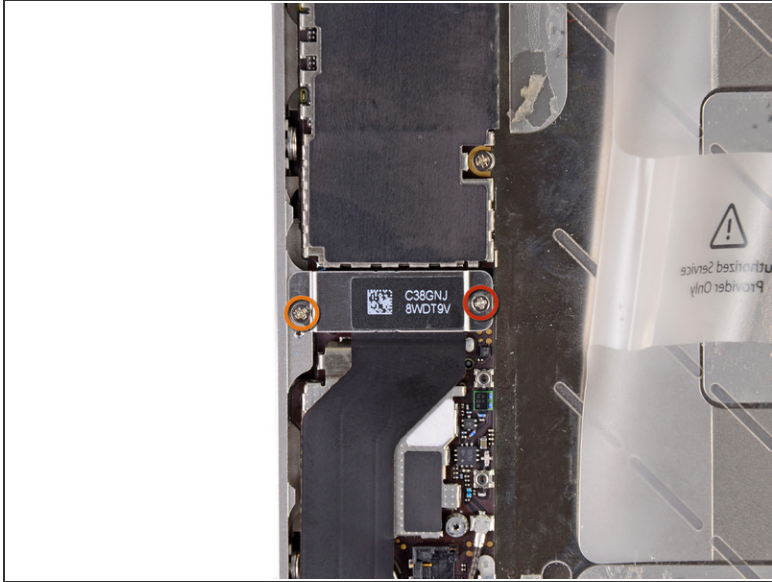


- Remove the following screws securing the dock connector cable cover to the logic board:
 - One 1.5 mm Phillips screw
 - One 1.2 mm Phillips screw
- Remove the metal dock connector cable cover.

Step 2



- Use the edge of a plastic opening tool to pry the dock cable up from its socket on the logic board.

Step 3

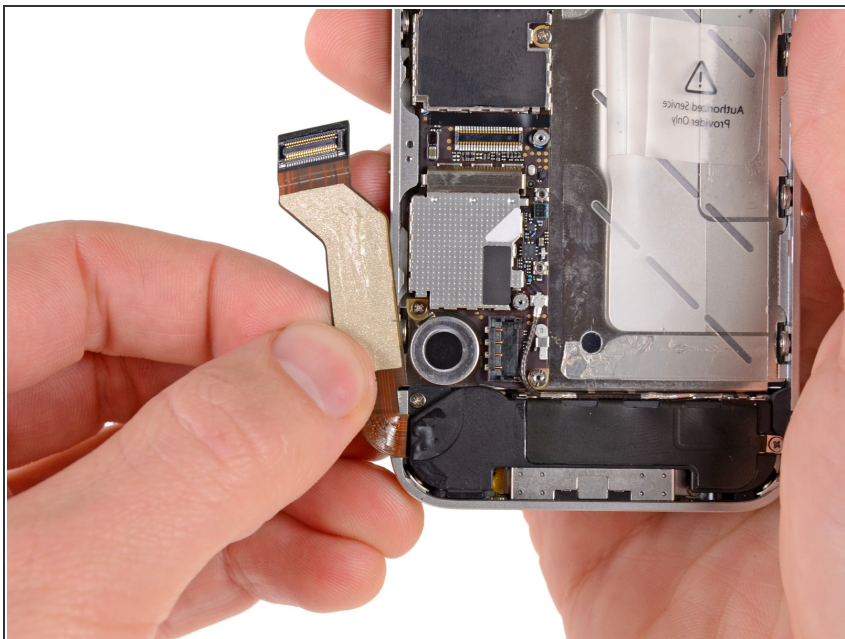

- Peel the dock connector cable off the adhesive securing it to the logic board and the side of the speaker enclosure.

Step 4



- Use the edge of a plastic opening tool to pry the cellular antenna cable up from its socket on the logic board.
- De-route the cellular antenna cable out from under the metal fingers attached to the logic board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-13 06:25:32 AM.